

Product highlights

Electric height-adjustable washbasins

Designline 417

Page 10

- Width 71.5 cm
- Modern design with multiple colour choices
- Mirror and lighting move in tandem with basin
- Plumbing connections are elegantly concealed in the lifting unit
- Easy-to-use hand controller



Basicline 433

Page 18



- Width 62 cm
- Integrated safety switch
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections
- Easy-to-use hand controller

Basicline 415

Page 26




- Width 65 cm
- Integrated safety switch
- Low unit (installs under wall-mounted mirror/cabinet)
- Plumbing connections are elegantly concealed in the lifting unit
- Easy-to-use hand controller

Designline 417

Electric height-adjustable washbasin module with mirror and lighting

- Width 71.5 cm
- Modern design with multiple colour choices
- Mirror and lighting move in tandem with basin
- Plumbing connections are elegantly concealed in the lifting unit
- Easy-to-use hand controller



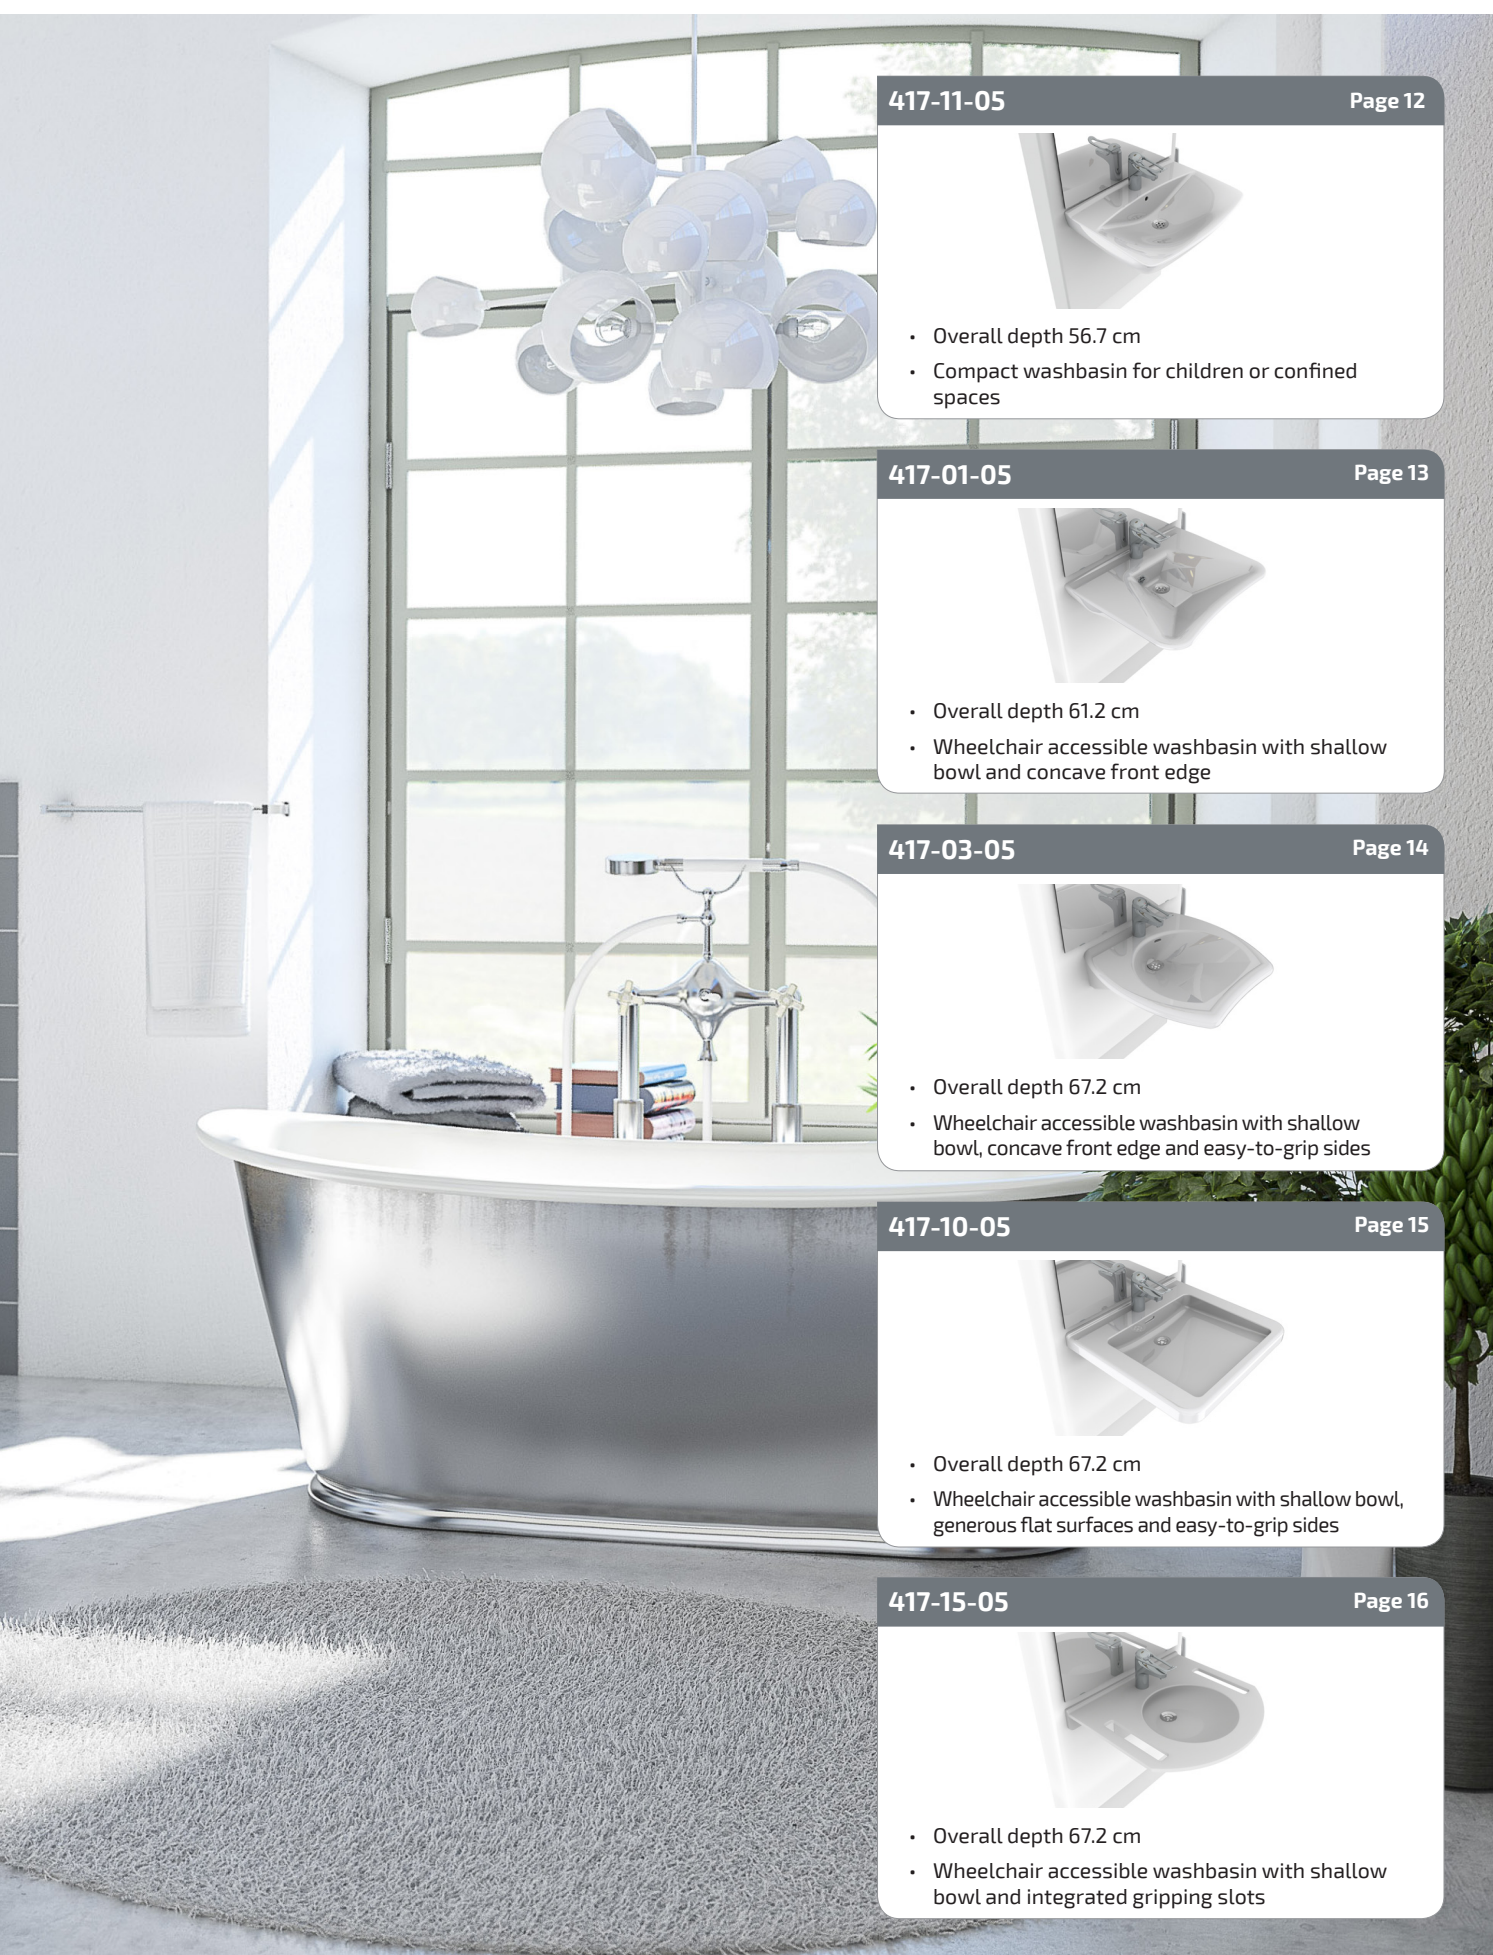

417-11-05


Page 12



- Overall depth 56.7 cm
- Compact washbasin for children or confined spaces

417-01-05


Page 13



- Overall depth 61.2 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

417-03-05

Page 14



- Overall depth 67.2 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

417-10-05


Page 15



- Overall depth 67.2 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

417-15-05

Page 16



- Overall depth 67.2 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



Functions and advantages

- Legroom under the washbasin, 445 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

Standard equipment



- Washbasin (425-011)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

Optional extras

- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	445 mm
Mixer	150 mm lever. Distance to mixer lever, 225 mm
Overall depth from wall	567 mm
Washbasin	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	715 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Lighting ramp: Solid oiled oak with 3 recessed spotlights (connected to external power switch) Spotlights: LED 3W, 3000K Transformer: 230V
Enclosure class	IPX4
Safety	Safety switch available as an option
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000x600x4 mm in silver-backed float glass with ground edges incl. mirror clips Mounting cover: White plastic
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE


Art. no.	Designation
 417-11-0501	DESIGNLINE 417-11-0501, White - incl. single lever mixer with 150 mm lever
 417-11-0505	DESIGNLINE 417-11-0505, Oak - incl. single lever mixer with 150 mm lever
 417-11-0510	DESIGNLINE 417-11-0510, Black - incl. single lever mixer with 150 mm lever

01 - White laminate (Formica F7949, white)
05 - Oak laminate (Formica K6149, oak).
10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate

Security system

Page 69

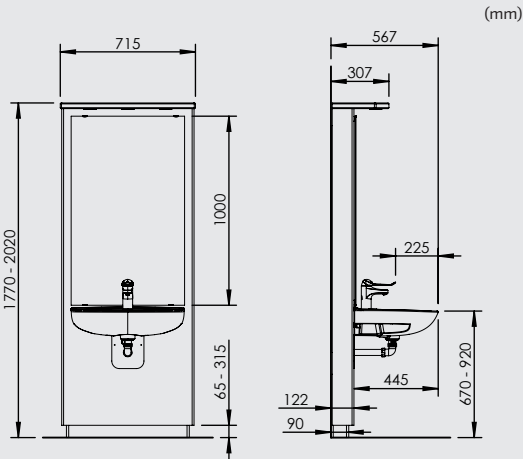



Functions and advantages

- Legroom under the washbasin, 490 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

Standard equipment



- Washbasin (425-001)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

Optional extras

- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	490 mm
Mixer	150 mm lever. Distance to mixer lever 265 mm
Overall depth from wall	612 mm
Washbasin	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	715 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Lighting ramp: Solid oiled oak with 3 √ recessed spotlights (connected to external power switch) Spotlights: LED 3W, 3000K Transformer: 230V
Enclosure class	IPX4
Safety	Safety switch available as an option
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Mounting cover: White plastic
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

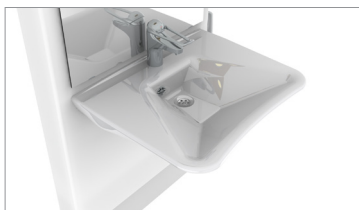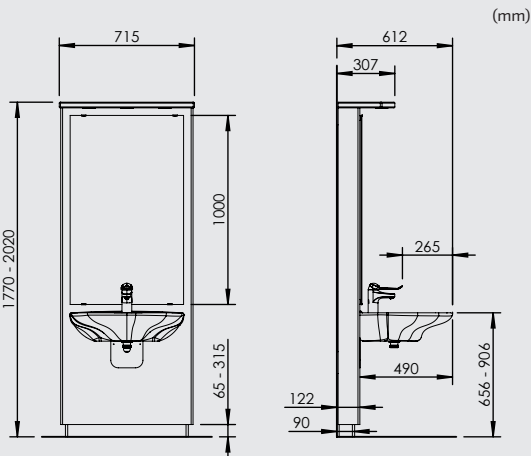

Art. no.	Designation
417-01-0501	DESIGNLINE 417-01-0501, White - incl. single lever mixer with 150 mm lever
417-01-0505	DESIGNLINE 417-01-0505, Oak - incl. single lever mixer with 150 mm lever
417-01-0510	DESIGNLINE 417-01-0510, Black - incl. single lever mixer with 150 mm lever

01 - White laminate (Formica F7949, white)
05 - Oak laminate (Formica K6149, oak).
10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate

Security system Page 69





Functions and advantages

- Legroom under the washbasin, 550 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

Standard equipment


- Washbasin (425-003)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

Optional extras

- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	550 mm
Mixer	150 mm lever. Distance to mixer lever, 324 mm
Overall depth from wall	672 mm
Washbasin	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	715 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Lighting ramp: Solid oiled oak with 3 √ recessed spotlights (connected to external power switch) Spotlights: LED 3W, 3000K Transformer: 230V
Enclosure class	IPX4
Safety	Safety switch available as an option
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Mounting cover: White plastic
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

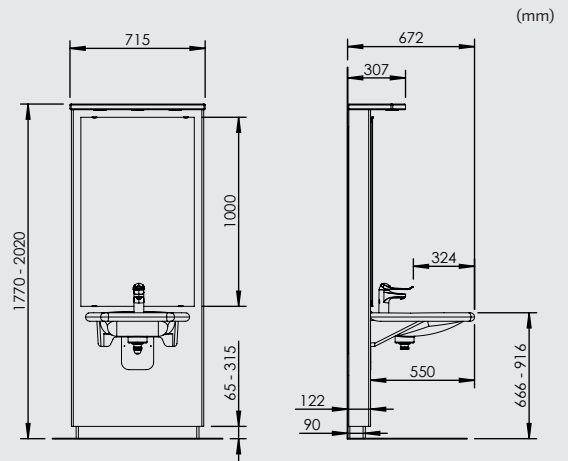

Art. no.	Designation
 417-03-0501	DESIGNLINE 417-03-0501, White - incl. single lever mixer with 150 mm lever
 417-03-0505	DESIGNLINE 417-03-0505, Oak - incl. single lever mixer with 150 mm lever
 417-03-0510	DESIGNLINE 417-03-0510, Black - incl. single lever mixer with 150 mm lever

01 - White laminate (Formica F7949, white)
05 - Oak laminate (Formica K6149, oak).
10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate





Art. no.	Designation
	<p>417-10-0501 DESIGNLINE 417-10-0501, White - incl. single lever mixer with 150 mm lever</p>
	<p>417-10-0505 DESIGNLINE 417-10-0505, Oak - incl. single lever mixer with 150 mm lever</p>
	<p>417-10-0510 DESIGNLINE 417-10-0510, Black - incl. single lever mixer with 150 mm lever</p>

01 - White laminate (Formica F7949, white)
05 - Oak laminate (Formica K6149, oak).
10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate



Functions and advantages

- Legroom under the washbasin, 550 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Standard equipment


- Washbasin (425-010)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

Optional extras

- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	550 mm
Mixer	150 mm lever. Distance to mixer lever, 330 mm
Overall depth from wall	672 mm
Washbasin	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	715 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Lighting ramp: Solid oiled oak with 3 ✓ recessed spot-lights (connected to external power switch) Spotlights: LED 3W, 3000K Transformer: 230V
Enclosure class	IPX4
Safety	Safety switch available as an option
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Mounting cover: White plastic
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

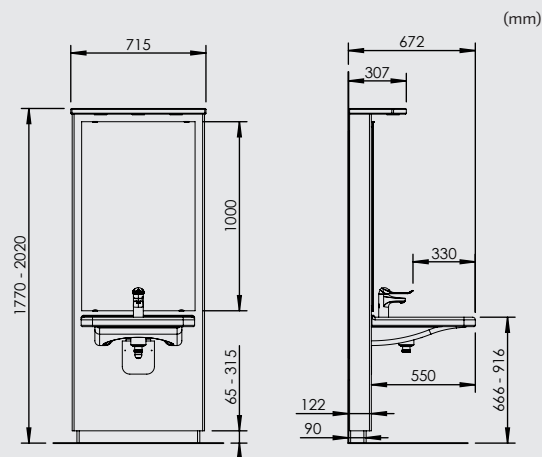



Functions and advantages

- Legroom under the washbasin, 550 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

Standard equipment



- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Mirror and lighting bar
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable

Optional extras

- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	550 mm
Mixer	150 mm lever. Distance to mixer lever, 315 mm
Overall depth from wall	672 mm
Washbasin	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	715 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Lighting ramp: Solid oiled oak with 3 √ recessed spotlights (connected to external power switch) Spotlights: LED 3W, 3000K Transformer: 230V
Enclosure class	IPX4
Safety	Safety switch available as an option
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Mounting cover: White plastic
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

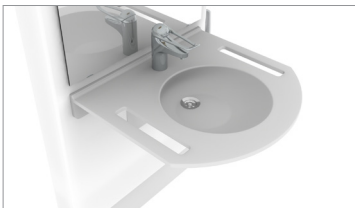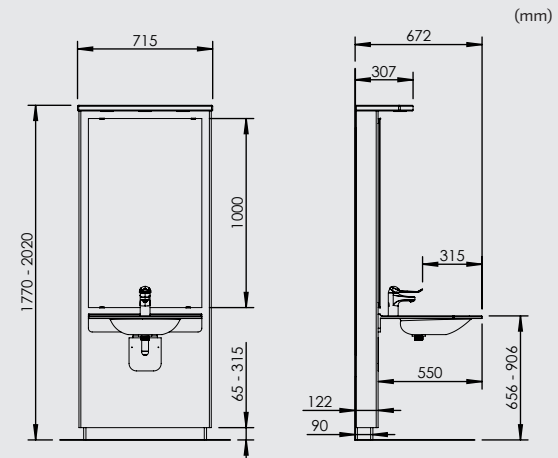

Art. no.	Designation
 417-15-0501	DESIGNLINE 417-15-0501, White - incl. single lever mixer with 150 mm lever
 417-15-0505	DESIGNLINE 417-15-0505, Oak - incl. single lever mixer with 150 mm lever
 417-15-0510	DESIGNLINE 417-15-0510, Black - incl. single lever mixer with 150 mm lever

01 - White laminate (Formica F7949, white)
05 - Oak laminate (Formica K6149, oak).
10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate





Functions and advantages

- Basin lifter for the optional washbasin

Standard equipment




- Mirror and lighting bar
- Hand controller with coiled cable

Recommended options

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap
- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Operation	Cable controller with hook, IP65
Width	715 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Lighting ramp: Solid oiled oak with 3 recessed spotlights (connected to external power switch) Spotlights: LED 3W, 3000K Transformer: 230V
Enclosure class	IPX4
Safety	Safety switch available as an option
Suitable basins	Max. weight: 40 kg Max width 670 mm Max depth: 600 mm Attachment: Washbasin, bolt installation centre-to-centre 280 mm
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Mounting cover: White plastic
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 417-0-01	DESIGNLINE 417-0-01, White - Excl. water hoses and drain hose
 417-0-05	DESIGNLINE 417-0-05, Oak - Excl. water hoses and drain hose
 417-0-10	DESIGNLINE 417-0-10, Black - Excl. water hoses and drain hose

Washbasin



Page 62

Mixer



Page 65

Hoses



Page 68

Safety system



Page 69


Control buttons



Page 69

- 01 - White laminate (Formica F7949, white)
- 05 - Oak laminate (Formica K6149, oak).
- 10 - Black laminate (Formica 2253, black)

Also available in a selection of Formica laminate.

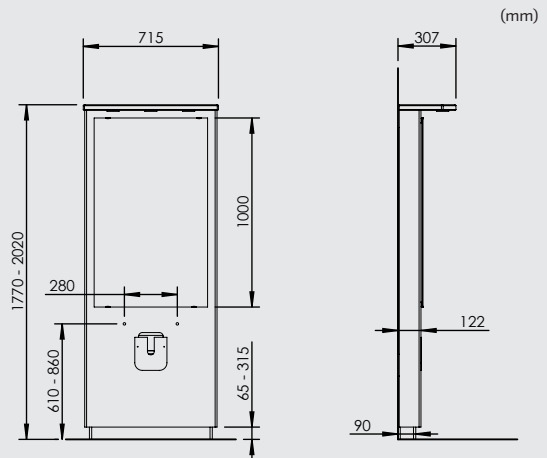

Basicline 433

Electric height-adjustable washbasin module with mirror and lighting

- Width 62 cm
- Integrated safety switch
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections
- Easy-to-use hand controller





433-11-05

Page 20



- Overall depth 60.0 cm
- Compact washbasin for children or confined spaces

433-01-05

Page 21



- Overall depth 64.6 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

433-03-05

Page 22



- Overall depth 70.6 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

433-10-05

Page 23



- Overall depth 70.6 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

433-15-05

Page 24



- Overall depth 70.6 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



Functions and advantages

- Legroom under the washbasin, 600 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

Standard equipment


- Washbasin (425-011)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	600 mm
Mixer	150 mm lever. Distance to mixer lever, 225 mm
Overall depth from wall	600 mm
Washbasin	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	620 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: White melamine covered chipboard W899 with 2 mm ABS strip all round Mounting plate, washbasin: Powder coated aluzinc-coated sheet steel, white RAL 9010 Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Safety switch and other sheet metal parts: Powder-coated sheet steel
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
433-11-05	BASICLINE 433-11-05 - incl. single lever mixer with 150 mm lever

(mm)

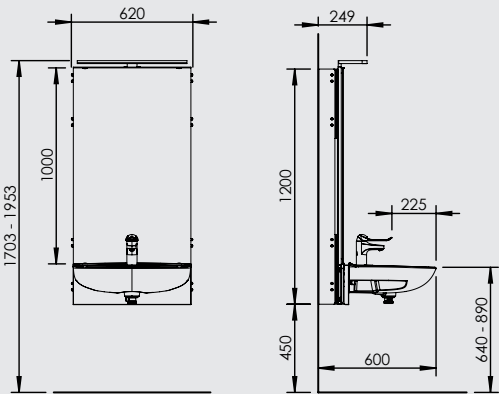



Art. no.	Designation
433-01-05	BASICLINE 433-01-05 - incl. single lever mixer with 150 mm lever

Functions and advantages


- Legroom under the washbasin, 646 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge


Standard equipment

- Washbasin (425-001)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	646 mm
Mixer	150 mm lever. Distance to mixer lever, 265 mm
Overall depth from wall	646 mm
Washbasin	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	620 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: White melamine covered chipboard W899 with 2 mm ABS strip all round Mounting plate, washbasin: Powder coated aluzinc-coated sheet steel, white RAL 9010 Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Safety switch and other sheet metal parts: Powder-coated sheet steel
Plumbing connections	Flexible water hoses and drain hose with water trap
CE	

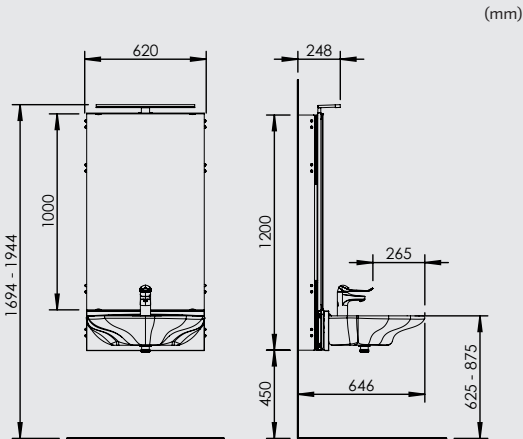

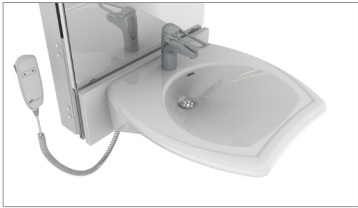

Art. no.	Designation
433-03-05	BASICLINE 433-03-05 - incl. single lever mixer with 150 mm lever

Functions and advantages


- Legroom under the washbasin, 706 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

Standard equipment

- Washbasin (425-003)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	706 mm
Mixer	150 mm lever. Distance to mixer lever, 324 mm
Overall depth from wall	706 mm
Washbasin	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	620 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: White melamine covered chipboard W899 with 2 mm ABS strip all round Mounting plate, washbasin: Powder coated aluzinc-coated sheet steel, white RAL 9010 Mirror: 1000x600x4 mm in silver-backed float glass with ground edges incl. mirror clips Safety switch and other sheet metal parts: Powder-coated sheet steel
Plumbing connections	Flexible water hoses and drain hose with water trap

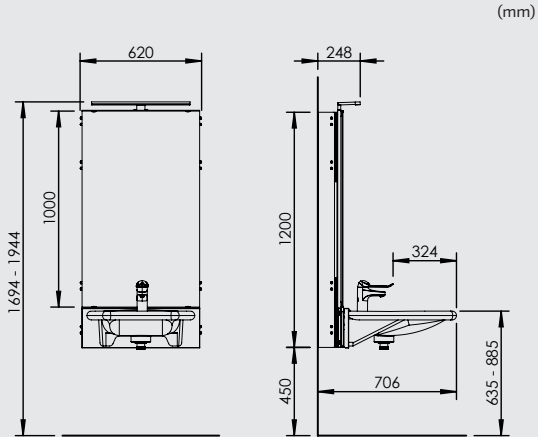



Art. no.	Designation
433-10-05	BASICLINE 433-10-05 - incl. single lever mixer with 150 mm lever

Functions and advantages

- Legroom under the washbasin, 706 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Standard equipment


- Washbasin (425-010)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	706 mm
Mixer	150 mm lever. Distance to mixer lever, 330 mm
Overall depth from wall	706 mm
Washbasin	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	620 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: White melamine covered chipboard W899 with 2 mm ABS strip all round Mounting plate, washbasin: Powder coated aluzinc-coated sheet steel, white RAL 9010 Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Safety switch and other sheet metal parts: Powder-coated sheet steel
Plumbing connections	Flexible water hoses and drain hose with water trap



(mm)

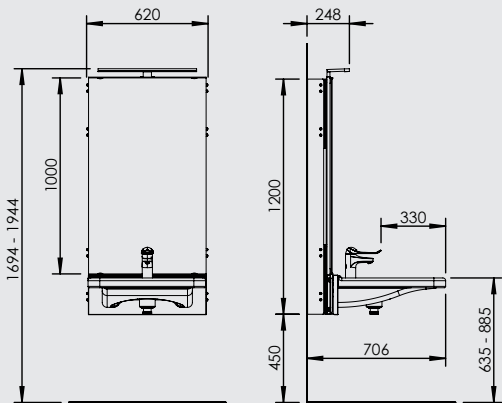



Art. no.	Designation
433-15-05	BASICLINE 433-15-05 - incl. single lever mixer with 150 mm lever

Functions and advantages

- Legroom under the washbasin, 706 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

Standard equipment


- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Legroom	706 mm
Mixer	150 mm lever. Distance to mixer lever, 315 mm
Overall depth from wall	706 mm
Washbasin	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	620 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: White melamine covered chipboard W899 with 2 mm ABS strip all round Mounting plate, washbasin: Powder coated aluzinc-coated sheet steel, white RAL 9010 Mirror: 1000x600x4 mm in silver-backed float glass with ground edges incl. mirror clips Safety switch and other sheet metal parts: Powder-coated sheet steel
Plumbing connections	Flexible water hoses and drain hose with water trap



(mm)

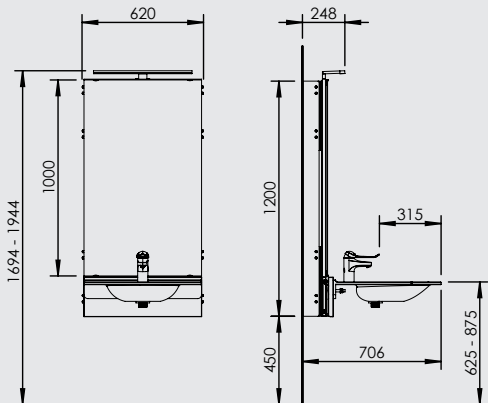



Functions and advantages

- Basin lifter for the optional washbasin

Standard equipment

- Mirror and lighting
- Hand controller with coiled cable

Recommended options

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap
- Safety breaker

Specifications

Lift model	Electric steplessly height-adjustable washbasin module with mirror and lighting
Operation	Cable controller with hook, IP65
Width	620 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Enclosure class	IPX4
Safety	Safety switch available as an option
Suitable basins	Max. weight: 40 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin, bolt installation centre-to-centre 280 mm
Material-specification	Back panel: White melamine covered chipboard W899 with 2 mm ABS strip all round Mounting plate, washbasin: Powder coated aluzinc-coated sheet steel, white RAL 9010 Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Other sheet metal parts Powder-coated sheet steel
Plumbing connections	Flexible drain hose with drainage trap
	CE

Art. no.	Designation
433-0.	BASICLINE 433-0 - Excl. safety switch , water hoses and drain hose



Washbasin



Page 62

Mixer



Page 65

Hoses



Page 68

Safety system




Page 69

Control buttons




Page 69

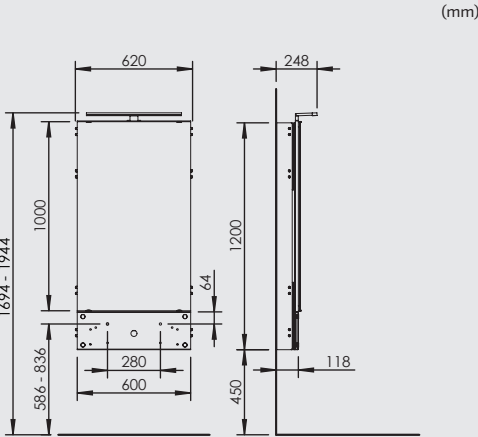

Basicline 415

Electrically height-adjustable washbasin, low-profile

- Width 65 cm
- Integrated safety switch
- Low unit (installs under wall-mounted mirror/cabinet)
- Plumbing connections are elegantly concealed in the lifting unit
- Easy-to-use hand controller

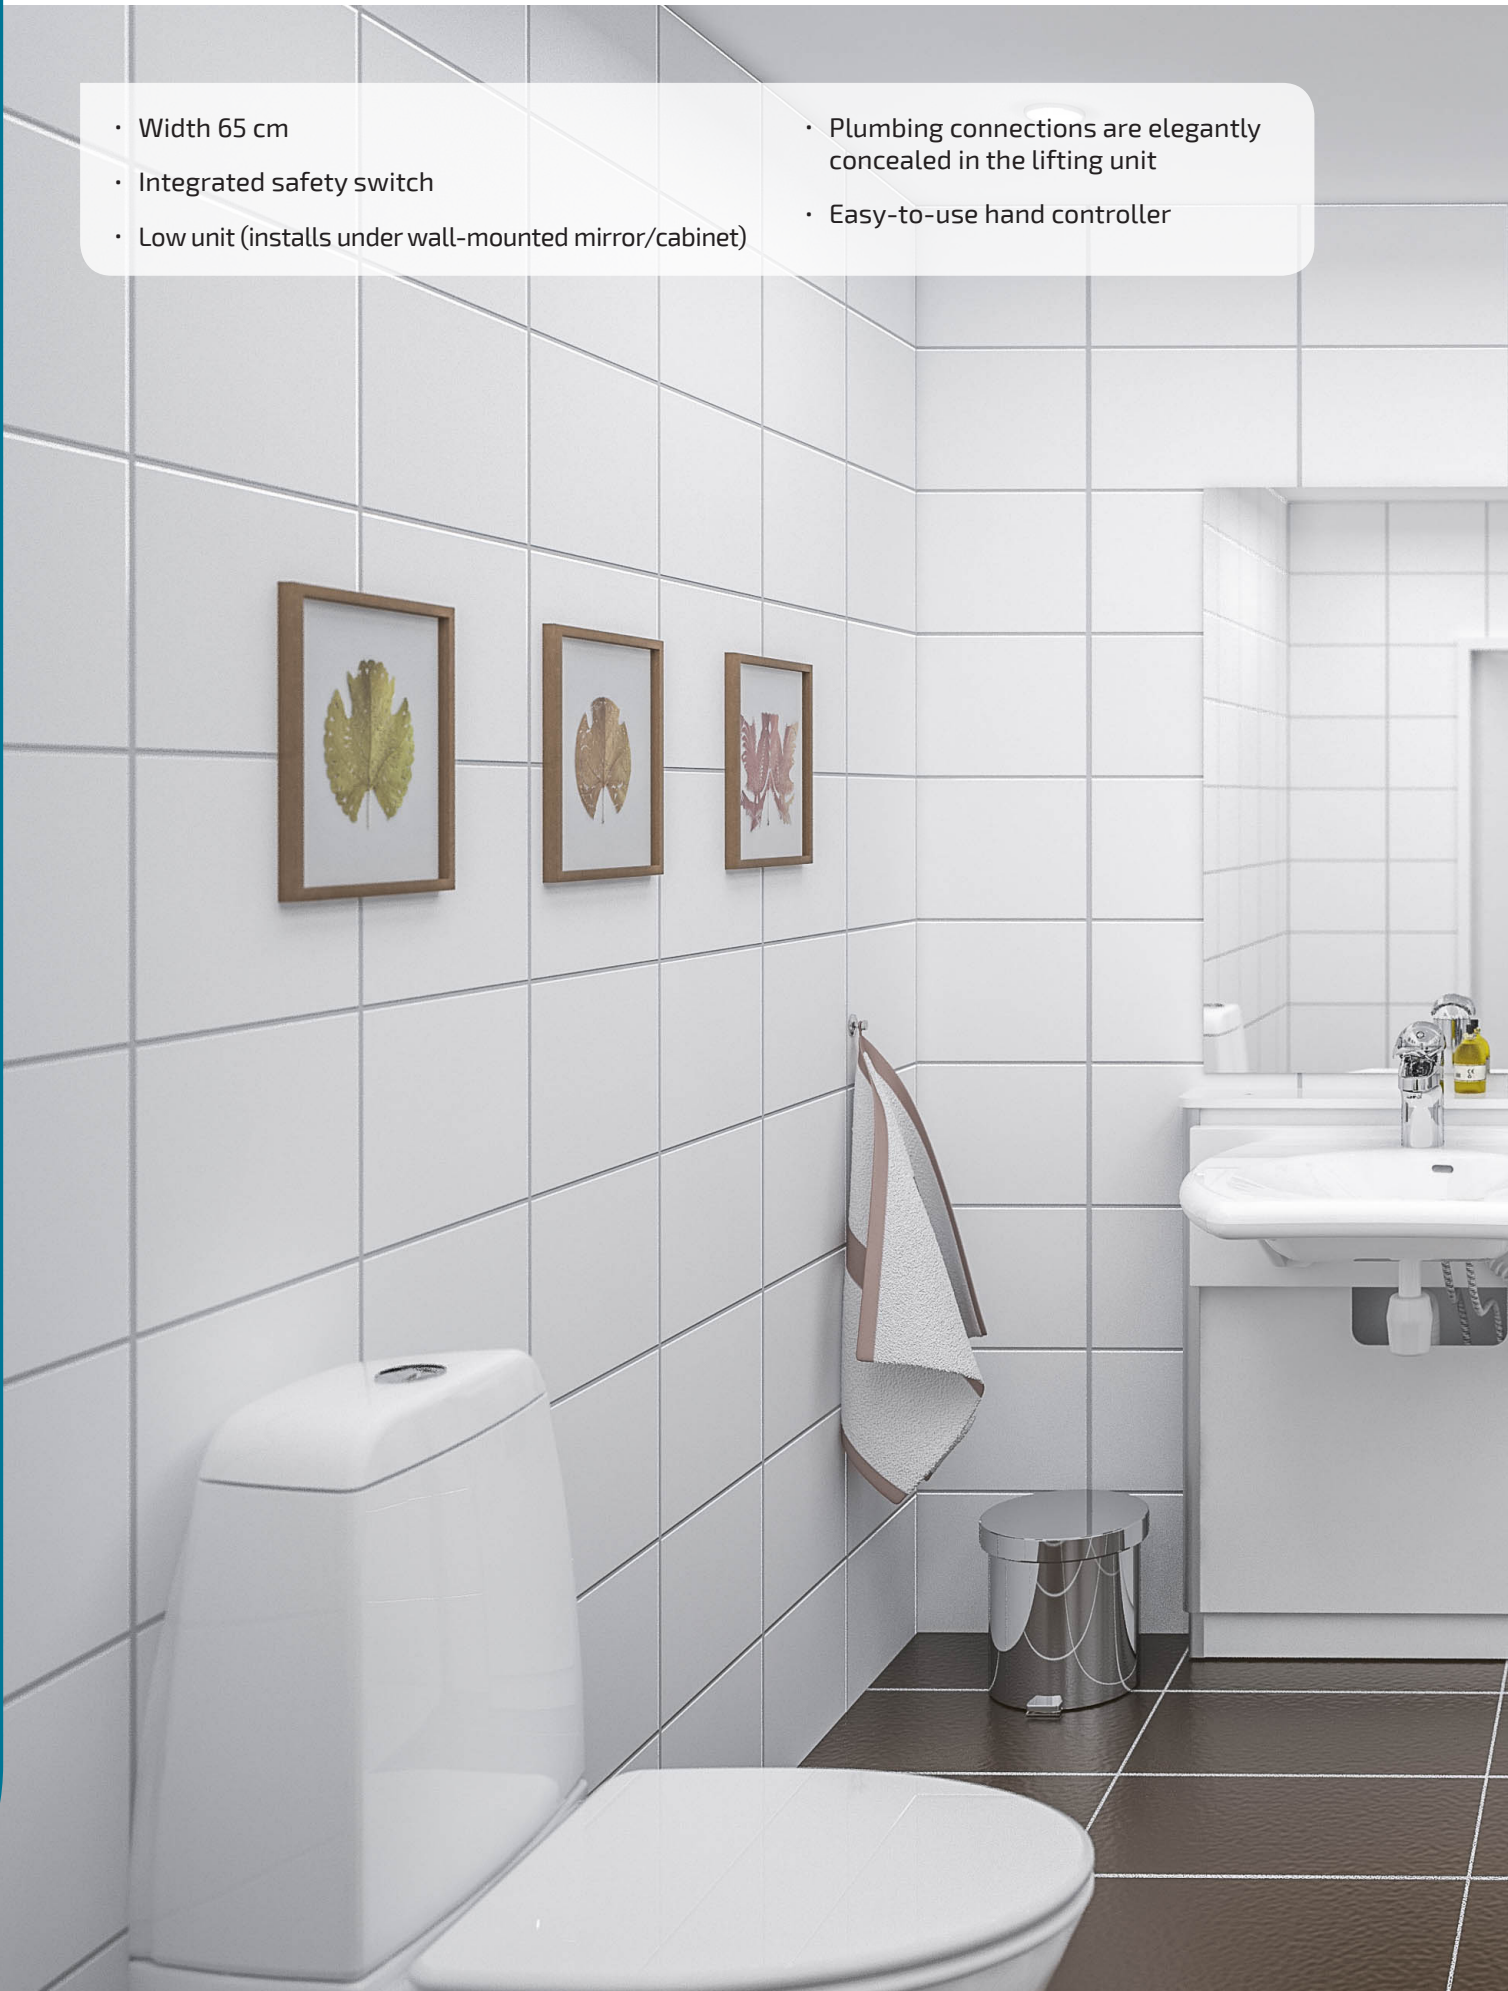



415-11-05

Page 28



- Overall depth 59.2 cm
- Compact washbasin for children or confined spaces

415-01-05

Page 29



- Overall depth 63.5 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

415-03-05

Page 30



- Overall depth 69.5 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

415-10-05

Page 31



- Overall depth 69.5 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

415-15-05

Page 32



- Overall depth 69.5 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



Art. no.	Designation
415-11-05	BASICLINE 415-11-05 - incl. single lever mixer with 150 mm lever



Functions and advantages

- Legroom under the washbasin, 482 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces


Standard equipment

- Washbasin (425-011)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric, steplessly adjustable washbasin unit, low-profile
Legroom	482 mm
Mixer	150 mm lever. Distance to mixer lever, 225 mm
Overall depth from wall	592 mm
Washbasin	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	650 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: 4 mm compact laminate with sides of anodised aluminium Top shelf: 12 mm compact laminate Safety switch: Powder-coated sheet steel Installation cover 4 mm compact laminate
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

(mm)

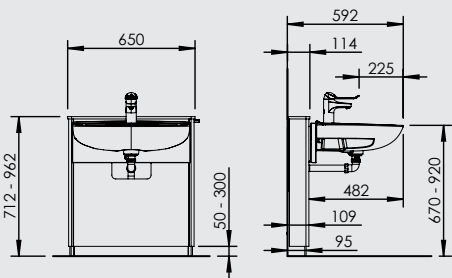



Art. no.	Designation
415-01-05	BASICLINE 415-01-05 - incl. single lever mixer with 150 mm lever

Functions and advantages


- Legroom under the washbasin, 526 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

Standard equipment

- Washbasin (425-001)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric, steplessly adjustable washbasin unit, low-profile
Legroom	526 mm
Mixer	150 mm lever. Distance to mixer lever, 265 mm
Overall depth from wall	635 mm
Washbasin	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	650 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: 4 mm compact laminate with sides of anodised aluminium Top shelf: 12 mm compact laminate Safety switch: Powder-coated sheet steel Installation cover 4 mm compact laminate
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

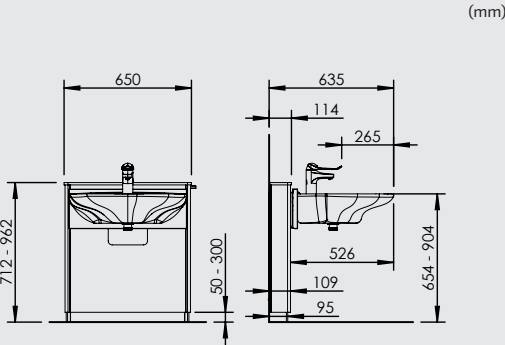



Art. no.	Designation
415-03-05	BASICLINE 415-03-05 - incl. single lever mixer with 150 mm lever



Functions and advantages

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides


Standard equipment

- Washbasin (425-003)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric, steplessly adjustable washbasin unit, low-profile
Legroom	586 mm
Mixer	150 mm lever. Distance to mixer lever, 324 mm
Overall depth from wall	695 mm
Washbasin	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	650 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: 4 mm compact laminate with sides of anodised aluminium Top shelf: 12 mm compact laminate Safety switch: Powder-coated sheet steel Installation cover 4 mm compact laminate
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

(mm)

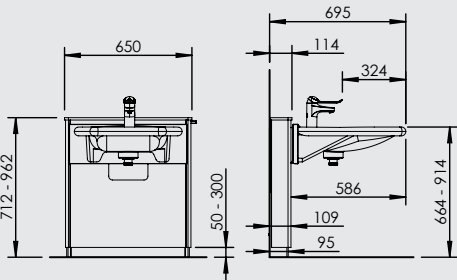



Functions and advantages

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Standard equipment


- Washbasin (425-010)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric, steplessly adjustable washbasin unit, low-profile
Legroom	586 mm
Mixer	150 mm lever. Distance to mixer lever, 330 mm
Overall depth from wall	695 mm
Washbasin	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	650 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: 4 mm compact laminate with sides of anodised aluminium Top shelf: 12 mm compact laminate Safety switch: Powder-coated sheet steel Installation cover 4 mm compact laminate
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
415-10-05	BASICLINE 415-10-05 - incl. single lever mixer with 150 mm lever

(mm)

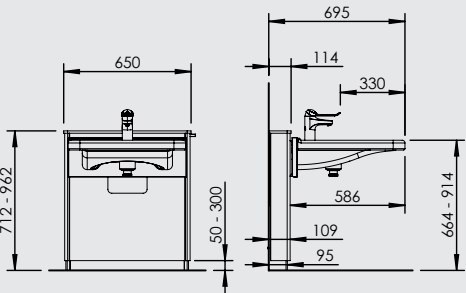



Art. no.	Designation
415-15-05	BASICLINE 415-15-05 - incl. single lever mixer with 150 mm lever



Functions and advantages

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots


Standard equipment

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses
- Hand controller with coiled cable
- Safety breaker

Specifications

Lift model	Electric, steplessly adjustable washbasin unit, low-profile
Legroom	586 mm
Mixer	150 mm lever. Distance to mixer lever, 315 mm
Overall depth from wall	695 mm
Washbasin	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
Max load, washbasin	50 kg
Operation	Cable controller with hook, IP65
Width	650 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Enclosure class	IPX4
Safety	The safety switch will stop the basin from lowering if it comes into contact with the user's legs.
Material-specification	Back panel: 4 mm compact laminate with sides of anodised aluminium Top shelf: 12 mm compact laminate Safety switch: Powder-coated sheet steel Installation cover 4 mm compact laminate
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

(mm)

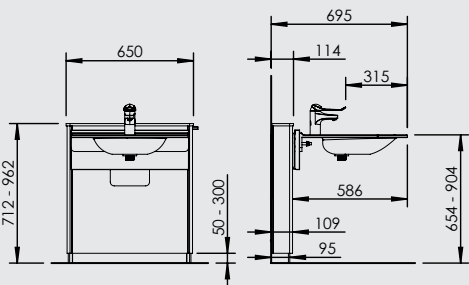



Functions and advantages

- Basin lifter for the optional washbasin

Standard equipment

- Hand controller with coiled cable

Recommended options

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap
- Safety breaker

Specifications

Lift model	Electric, steplessly adjustable washbasin unit, low-profile
Operation	Cable controller with hook, IP65
Width	650 mm
Installation	Wall mounted
Height adjustment	250 mm
Speed	18 mm/sec.
Lifting force	100 kg
Electrical connection	Plug for 230 V, max 1.5A
Enclosure class	IPX4
Safety	Safety switch available as an option
Suitable basins	Max. weight: 40 kg Max width 590 mm Max depth: 600 mm Attachment: Washbasin, bolt installation centre-to-centre 280 mm
Material-specification	Back panel: 4 mm compact laminate with sides of anodised aluminium Top shelf: 12 mm compact laminate Installation cover 4 mm compact laminate
Plumbing connections	Flexible drain hose with drainage trap
	CE

Art. no.	Designation
415-0.	BASICLINE 415-0 - Excl. safety switch , water hoses and drain hose



(mm)

Washbasin



Page 62

Mixer



Page 65

Hoses



Page 68

Safety system




Page 69

Control buttons



Page 69

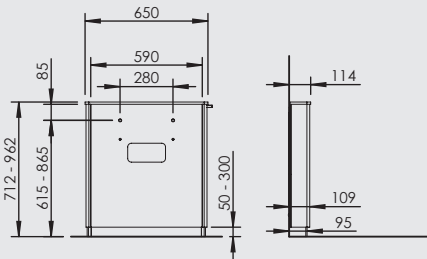

Product highlights


Manually height-adjustable washbasins

Basicline 401

Page 36




- Width 60 cm
- Manual adjustment in intervals of 50 mm
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections

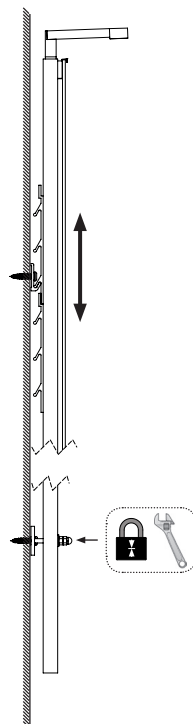




- Width 60 cm
- Manual, stepless adjustment with socket spanner
- Free space below the unit for plumbing connections




- Width 60 cm
- Manual adjustment with gas spring in intervals of 12 mm
- Practical countertop behind the washbasin
- Free space below the unit for plumbing connections



Basicline 401

Manual height-adjustable washbasin module with mirror and lighting

- Width 60 cm
- Manual adjustment in intervals of 50 mm
- Mirror and lighting move in tandem with basin
- Free space below the unit for plumbing connections

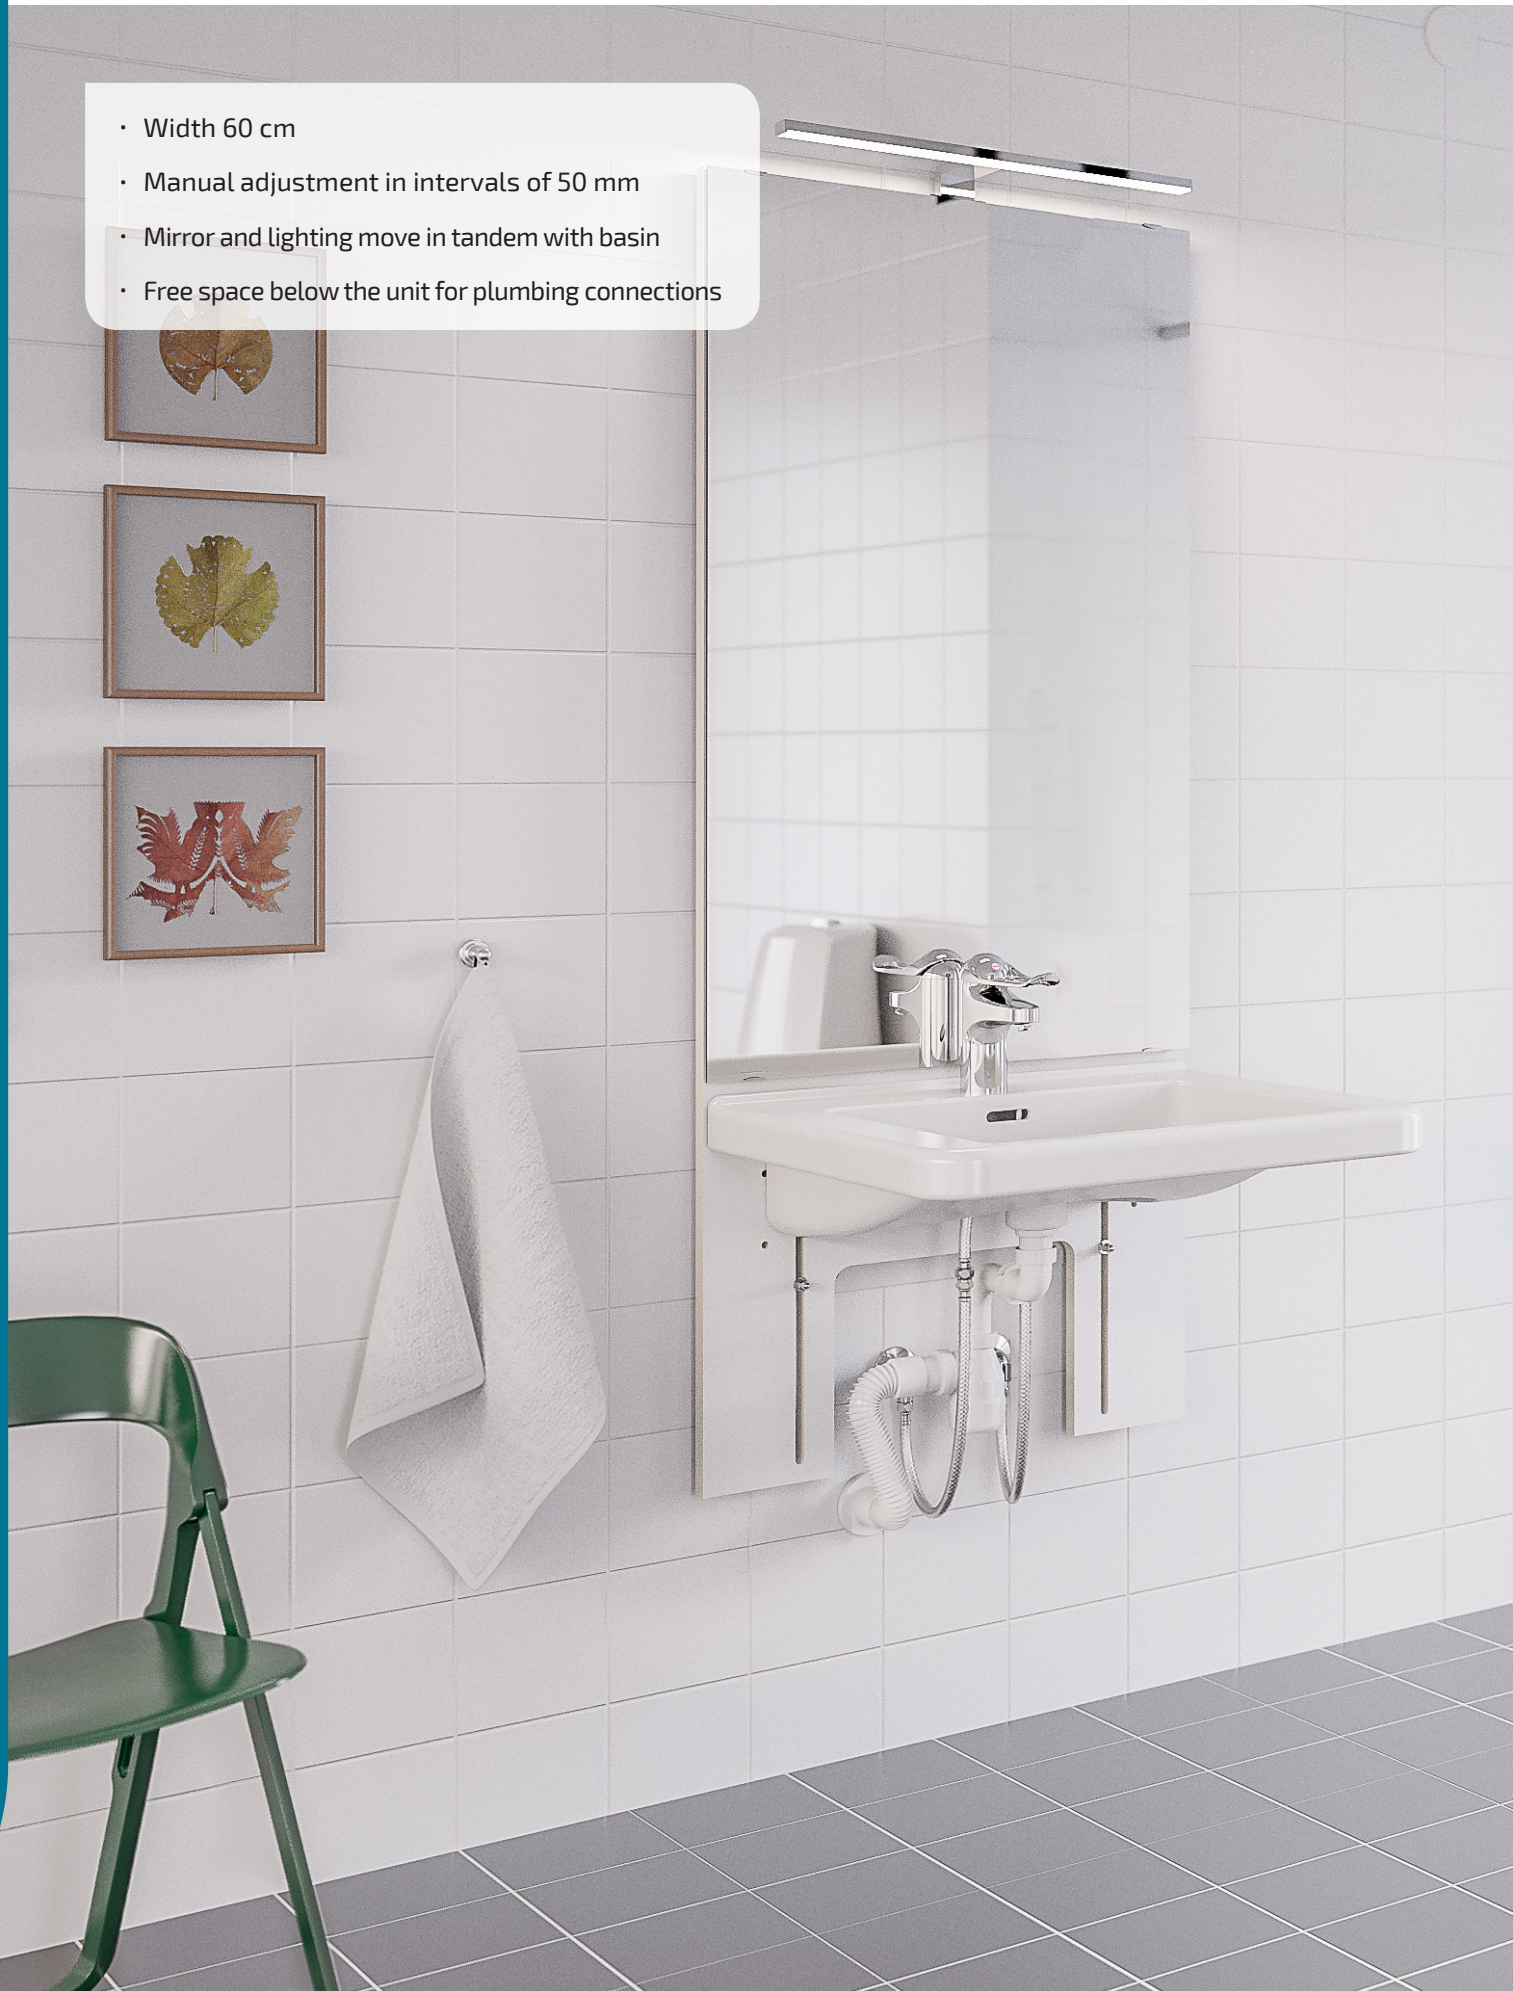



401-11-05

Page 38



- Overall depth 48.2 cm
- Compact washbasin for children or confined spaces

401-01-05

Page 39



- Overall depth 52.7 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

401-03-05

Page 40



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

401-10-05

Page 41



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

401-15-05

Page 42



- Overall depth 58.7 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



Functions and advantages

- Legroom under the washbasin, 482 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

Standard equipment

- Washbasin (425-011)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock


Specifications


Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	482 mm
Mixer	150 mm lever. Distance to mixer lever, 225 mm
Overall depth from wall	482 mm
Washbasin	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
401-11-05	BASICLINE 401-11-05 - incl. single lever mixer with 150 mm lever



(mm)

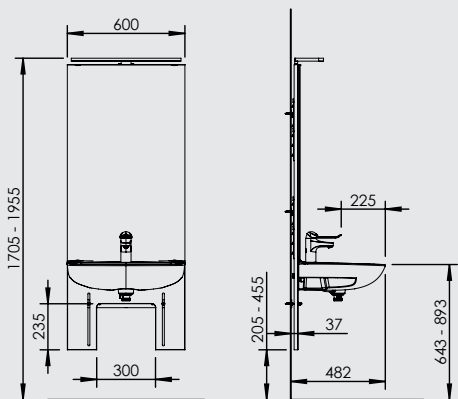

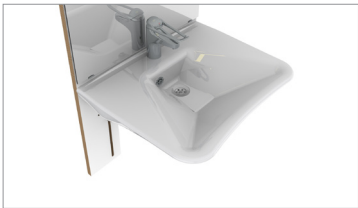

Art. no.	Designation
401-01-05	BASICLINE 401-01-05 - incl. single lever mixer with 150 mm lever



Functions and advantages


- Legroom under the washbasin, 527 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

Standard equipment

- Washbasin (425-001)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	527 mm
Mixer	150 mm lever. Distance to mixer lever, 265 mm
Overall depth from wall	527 mm
Washbasin	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

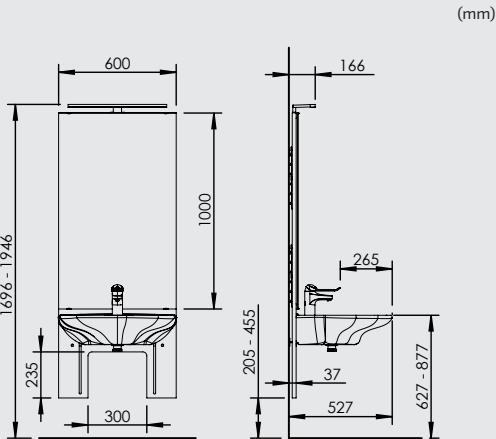



Art. no.	Designation
401-03-05	BASICLINE 401-03-05 - incl. single lever mixer with 150 mm lever



Functions and advantages

- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides


Standard equipment

- Washbasin (425-003)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	587 mm
Mixer	150 mm lever. Distance to mixer lever, 324 mm
Overall depth from wall	587 mm
Washbasin	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000x600x4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

(mm)

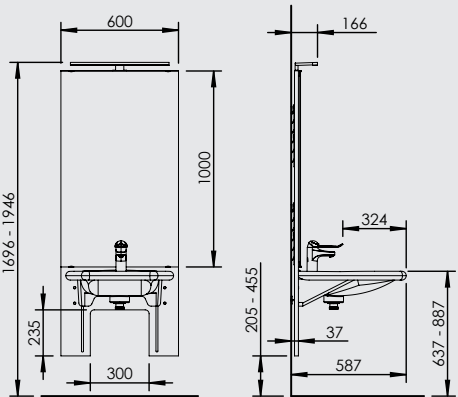



Art. no.	Designation
401-10-05	BASICLINE 401-10-05 - incl. single lever mixer with 150 mm lever

Functions and advantages


- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Standard equipment

- Washbasin (425-010)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	587 mm
Mixer	150 mm lever. Distance to mixer lever, 330 mm
Overall depth from wall	587 mm
Washbasin	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

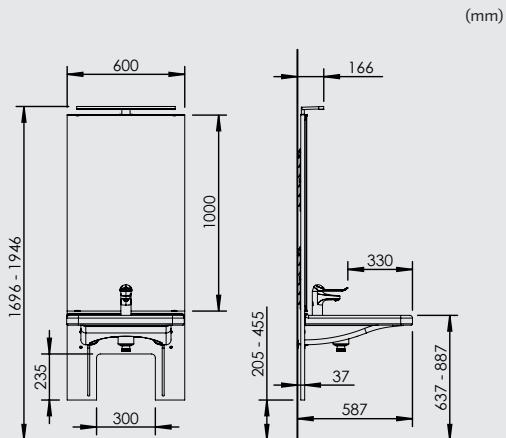



Art. no.	Designation
401-15-05	BASICLINE 401-15-05 - incl. single lever mixer with 150 mm lever



Functions and advantages

- Legroom under the washbasin, 587 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots


Standard equipment

- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Mirror and lighting
- Flexible drain hose with drainage trap
- Flexible water hoses
- Track safety lock

Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Legroom	587 mm
Mixer	150 mm lever. Distance to mixer lever, 315 mm
Overall depth from wall	587 mm
Washbasin	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

(mm)

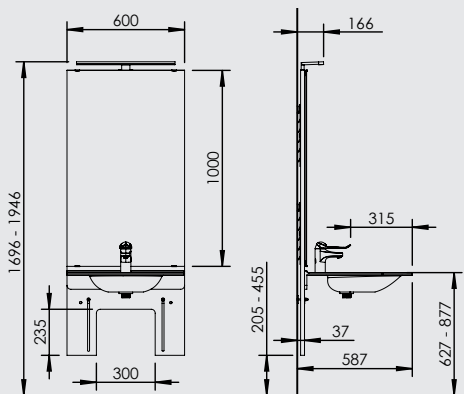



Functions and advantages

- Washbasin module optional basin

Standard equipment

- Mirror and lighting
- Track safety lock

Recommended options

- Washbasin
- Mixer
- Flexible water hoses
- Flexible drain hose with drainage trap


Specifications

Lift model	Manual steplessly height-adjustable washbasin module with mirror and lighting Suspended from wall track, adjustable in intervals of 50 mm
Width	600 mm
Installation	Wall mounted
Height adjustment	250 mm, intervals of 50 mm
Lighting	Aluminium/plastic, colour: chrome LED lighting, 7W, 4000 k (connects to external power) Transformer: 230 V
Safety	The unit is equipped with a safety lock to prevent accidental unhooking from wall track.
Suitable basins	Max. weight: 40 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin with bolt installation centre-to-centre 280 mm or 350 mm
Material-specification	Back panel: Plywood coated with high-pressure laminate Mirror: 1000/600/4 mm in silver-backed float glass with ground edges incl. mirror clips Wall track and hook suspension: Aluminium
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
401-1.	BASICLINE 401-1 - Excl. water hoses and drain hose



(mm)

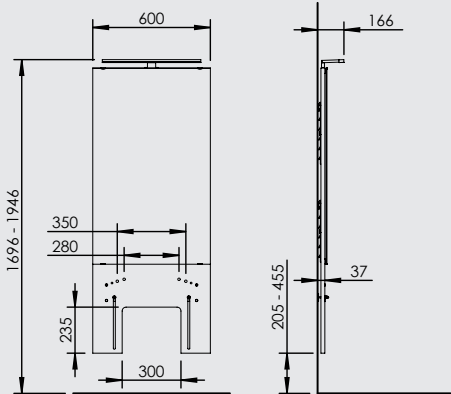

Washbasin



Page 62

Mixer



Page 65

Hoses



Page 68

Basicline 403

Manually height-adjustable washbasins

- Width 60 cm
- Manual, stepless adjustment with socket spanner
- Free space below the unit for plumbing connections





403-11-05

Page 46



- Overall depth 48.2 cm
- Compact washbasin for children or confined spaces

403-01-05

Page 47



- Overall depth 52.6 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

403-03-05

Page 48



- Overall depth 58.6 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

403-10-05


Page 49



- Overall depth 58.6 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

403-15-05

Page 50



- Overall depth 58.6 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



Functions and advantages

- Legroom under the washbasin, 482 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

Standard equipment


- Washbasin (425-011)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, steplessly adjustable washbasin unit Adjust-ment with socket spanner
Legroom	482 mm
Mixer	150 mm lever. Distance to mixer lever, 225 mm
Overall depth from wall	482 mm
Washbasin	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	300 mm
Material-specification	Powder coated aluzinc-coated sheet steel, white RAL 9010
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 403-11-05	BASICLINE 403-11-05 - incl. single lever mixer with 150 mm lever

(mm)

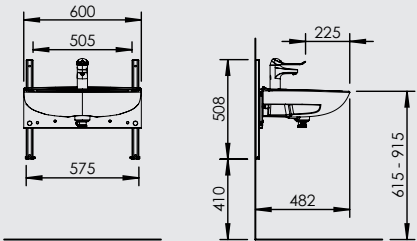



Functions and advantages

- Legroom under the washbasin, 526 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

Standard equipment

- Washbasin (425-001)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
Legroom	526 mm
Mixer	150 mm lever. Distance to mixer lever, 265 mm
Overall depth from wall	526 mm
Washbasin	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	300 mm
Material-specification	Powder coated aluzinc-coated sheet steel, white RAL 9010
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.


Designation

403-01-05

BASICLINE 403-01-05
- incl. single lever mixer with 150 mm lever



(mm)

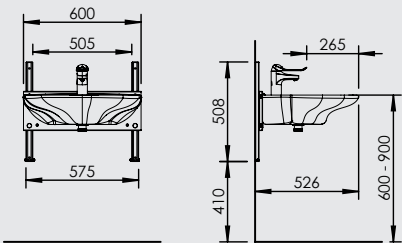



Functions and advantages

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

Standard equipment


- Washbasin (425-003)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
Legroom	586 mm
Mixer	150 mm lever. Distance to mixer lever, 324 mm
Overall depth from wall	586 mm
Washbasin	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	300 mm
Material-specification	Powder coated aluzinc-coated sheet steel, white RAL 9010
Plumbing connections	Flexible water hoses and drain hose with water trap
CE	

Art. no.	Designation
 403-03-05	BASICLINE 403-03-05 - incl. single lever mixer with 150 mm lever

(mm)

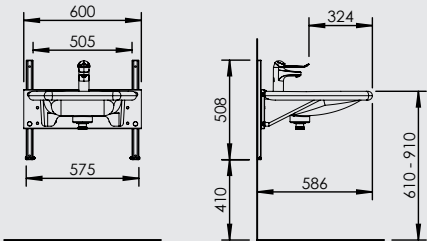



Functions and advantages

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Standard equipment

- Washbasin (425-010)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
Legroom	586 mm
Mixer	150 mm lever. Distance to mixer lever, 330 mm
Overall depth from wall	586 mm
Washbasin	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	300 mm
Material-specification	Powder coated aluzinc-coated sheet steel, white RAL 9010
Plumbing connections	Flexible water hoses and drain hose with water trap
CE	

Art. no.


Designation

403-10-05

BASICLINE 403-10-05
- incl. single lever mixer with 150 mm lever



(mm)

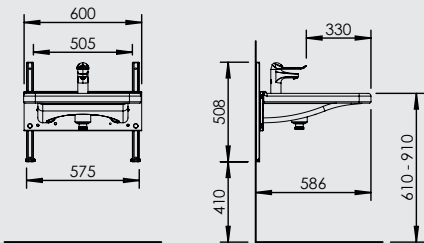



Functions and advantages

- Legroom under the washbasin, 586 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

Standard equipment


- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications


Lift model	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
Legroom	586 mm
Mixer	150 mm lever. Distance to mixer lever, 315 mm
Overall depth from wall	586 mm
Washbasin	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
Max load, washbasin	100 kg
Width	600 mm
Installation	Wall mounted
Height adjustment	300 mm
Material-specification	Powder coated aluzinc-coated sheet steel, white RAL 9010
Plumbing connections	Flexible water hoses and drain hose with water trap
CE	


Art. no.	Designation
 403-15-05	BASICLINE 403-15-05 - incl. single lever mixer with 150 mm lever

(mm)

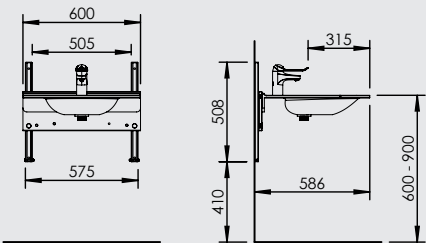

403-1

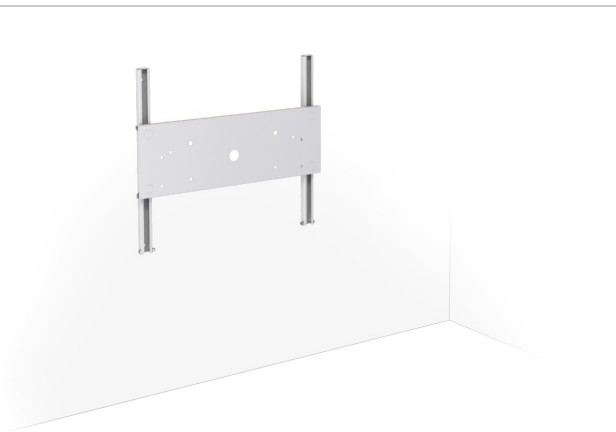

Art. no.	Designation
	403-1. BASICLINE 403-1 - Depth 36 mm

Functions and advantages

- Washbasin bracket optional basin
- 3 different depths: 36 mm / 120 mm / 220 mm


Standard equipment


- Washbasin bracket adjustable with socket spanner

Recommended options

- Washbasin
- Mixer
- Flexible drain hose with drainage trap
- Flexible water hoses


403-2

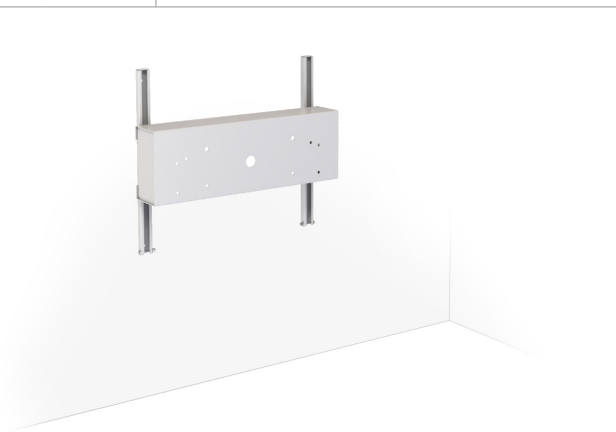

Art. no.	Designation
	403-2. BASICLINE 403-2 - Depth 120 mm

403-3



Art. no.	Designation
	403-3. BASICLINE 403-3 - Depth 220 mm

Washbasin



Page 62

Mixer



Page 65


Hoses



Page 68

Specifications

Lift model	Manual, steplessly adjustable washbasin unit Adjustment with socket spanner
Width	600 mm
Installation	Wall mounted
Height adjustment	300 mm
Suitable basins	Max. weight: 40 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin, bolt installation centre-to-centre 280 mm
Material-specification	Powder coated aluzinc-coated sheet steel, white RAL 9010
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

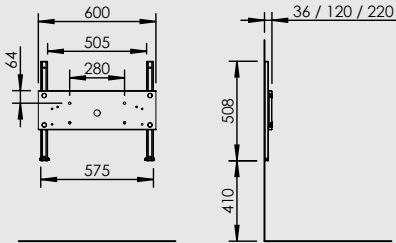

(mm)

Basicline 406

Gas strut operated height-adjustable washbasins

- Width 60 cm
- Manual adjustment with gas spring in intervals of 12 mm
- Practical countertop behind the washbasin
- Free space below the unit for plumbing connections





406-11-05

Page 54



- Overall depth 55.5 cm
- Compact washbasin for children or confined spaces

406-01-05

Page 55



- Overall depth 60.0 cm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

406-03-05

Page 56



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

406-10-05

Page 57



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

406-15-05

Page 58



- Overall depth 66.0 cm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots



Functions and advantages


- Legroom under the washbasin, 555 mm
- Distance to mixer lever, 225 mm
- Compact washbasin for children or confined spaces

Standard equipment


- Washbasin (425-011)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	555 mm
Mixer	150 mm lever. Distance to mixer lever, 225 mm
Overall depth from wall	555 mm
Washbasin	Porcelain washbasin 600x445 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 406-11-05	BASICLINE 406-11-05 - incl. single lever mixer with 150 mm lever

(mm)

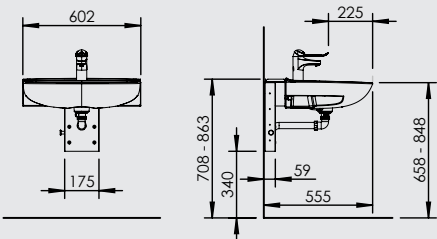



Functions and advantages

- Legroom under the washbasin, 600 mm
- Distance to mixer lever, 265 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge


Standard equipment

- Washbasin (425-001)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses


Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	600 mm
Mixer	150 mm lever. Distance to mixer lever, 265 mm
Overall depth from wall	600 mm
Washbasin	Porcelain washbasin 600x490 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
 406-01-05	BASICLINE 406-01-05 - incl. single lever mixer with 150 mm lever

(mm)

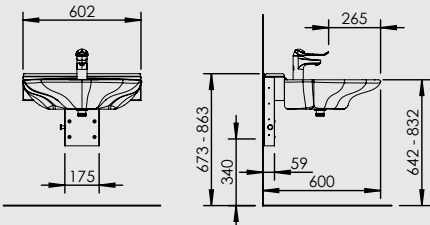



Functions and advantages

- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 324 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides


Standard equipment

- Washbasin (425-003)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses


Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	660 mm
Mixer	150 mm lever. Distance to mixer lever, 324 mm
Overall depth from wall	660 mm
Washbasin	Porcelain washbasin 550x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE



Art. no.	Designation
 406-03-05	BASICLINE 406-03-05 - incl. single lever mixer with 150 mm lever

(mm)

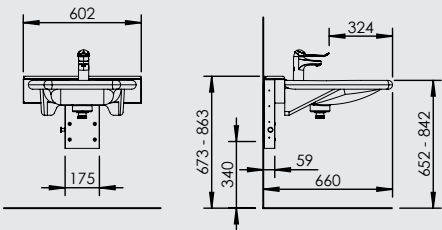



Functions and advantages

- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 330 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Standard equipment

- Washbasin (425-010)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses


Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	660 mm
Mixer	150 mm lever. Distance to mixer lever, 330 mm
Overall depth from wall	660 mm
Washbasin	Porcelain washbasin 600x550 mm, incl. overflow and bottom drain with plug
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
406-10-05	BASICLINE 406-10-05 - incl. single lever mixer with 150 mm lever



(mm)

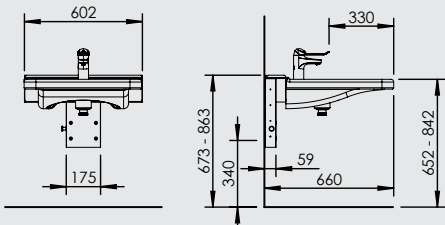



Functions and advantages


- Legroom under the washbasin, 660 mm
- Distance to mixer lever, 315 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

Standard equipment


- Washbasin, excl. overflow (425-015)
- Mixer (425-105)
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Legroom	660 mm
Mixer	150 mm lever. Distance to mixer lever, 315 mm
Overall depth from wall	660 mm
Washbasin	Wash basin of solid surface material with integrated grab handles 600x550 mm, excl. overflow
Max load, washbasin	50 kg
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
 406-15-05	BASICLINE 406-15-05 - incl. single lever mixer with 150 mm lever

(mm)

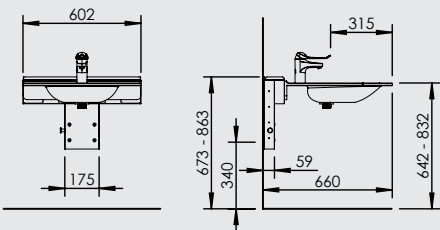



Functions and advantages

- Washbasin bracket optional basin with bolt installation centre-to-centre 280 mm or 350 mm

Standard equipment

- Washbasin bracket adjustable with gas spring
- Installation bolts for the washbasin

Recommended options

- Washbasin, bolt installation centre-to-centre 280 mm
- Mixer
- Flexible drain hose with drainage trap
- Flexible water hoses

Specifications

Lift model	Manual, adjustable washbasin unit Adjustment with gas spring. Adjustable in intervals of 12 mm
Width	602 mm
Installation	Wall mounted
Height adjustment	190 mm in intervals of 12 mm
Suitable basins	Max. weight: 12-18 kg Max width 600 mm Max depth: 600 mm Attachment: Washbasin with bolt installation centre-to-centre 280 mm or 350 mm
Material-specification	Epoxy coated aluminium, white (RAL 9016)
Plumbing connections	Flexible water hoses and drain hose with water trap
	CE

Art. no.	Designation
406-1.	BASICLINE 406-1 - Excl. water hoses and drain hose

Washbasin



Page 62

Mixer




Page 65

Hoses



Page 68

(mm)

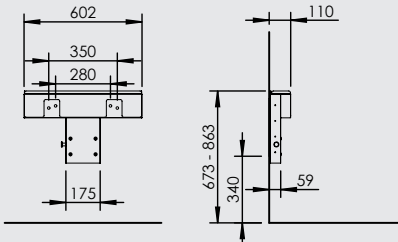

Washbasin, mixer and accessories





Washbasin



Art. no.	Designation
425-011.	Granberg washbasin (425-011)


Functions and advantages

- Legroom under the washbasin, 445 mm
- Compact washbasin for children or confined spaces

Specifications

Size	600x445 mm
Legroom	445 mm
Design	Porcelain washbasin incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Installation	Bolt installation, CC 280 mm

(mm)

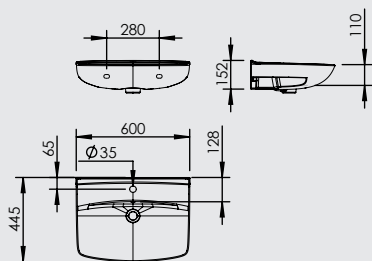

Art. no.	Designation
425-001	Granberg washbasin 425-001, with overflow and strainer drain


Functions and advantages

- Legroom under the washbasin, 490 mm
- Wheelchair accessible washbasin with shallow bowl and concave front edge

Specifications

Size	600x490 mm
Legroom	490 mm
Design	Porcelain washbasin incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Installation	Bolt installation, CC 280 mm

(mm)

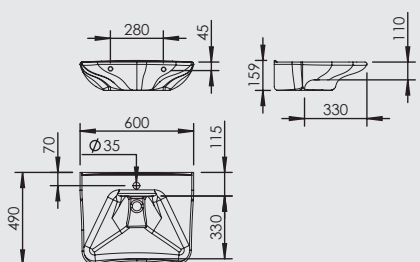

Washbasin



Art. no.	Designation
425-003.	Granberg washbasin (425-003)


Functions and advantages

- Legroom under the washbasin, 550 mm
- Wheelchair accessible washbasin with shallow bowl, concave front edge and easy-to-grip sides

Specifications

Size	550x550 mm
Legroom	550 mm
Design	Porcelain washbasin incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Installation	Bolt installation, CC 280 mm

(mm)

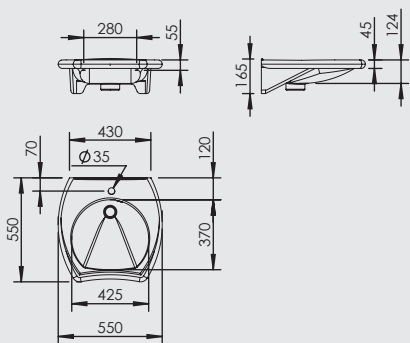

Art. no.	Designation
425-010.	Granberg washbasin (425-010)


Functions and advantages

- Legroom under the washbasin, 550 mm
- Wheelchair accessible washbasin with shallow bowl, generous flat surfaces and easy-to-grip sides

Specifications

Size	600x550 mm
Legroom	550 mm
Design	Porcelain washbasin incl. overflow and bottom drain with plug
Max load, washbasin	100 kg
Installation	Bolt installation, CC 280 mm

(mm)

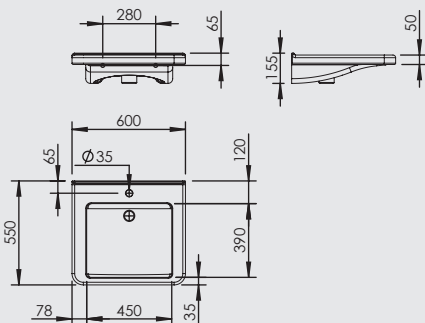



Art. no.	Designation
425-015.	Granberg washbasin (425-015)


Functions and advantages

- Legroom under the washbasin, 550 mm
- Wheelchair accessible washbasin with shallow bowl and integrated gripping slots

Specifications

Size	600x550 mm
Legroom	550 mm
Design	Wash basin of solid surface material with integrated grab handles, excl. overflow
Max load, washbasin	150 kg
Installation	Bolt installation, CC 280 mm

(mm)

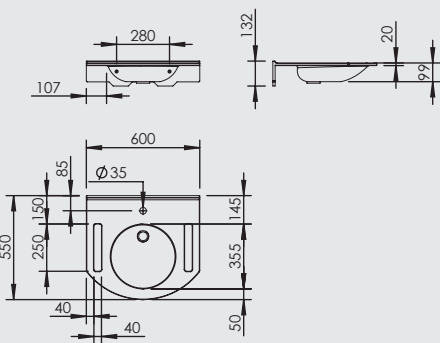




Art. no.	Designation
425-105.	Basin mixer Granberg 425-105 - 150 mm lever

Functions and advantages

- Easily accessible lever, length 150 mm

Specifications

Lever	150 mm
Spout projection	100 mm
Connection pipe	Soft PEX pipe, length 360 mm
Hole size	Ø 33.5–37 mm
Other	Cold start feature Soft action ceramic shut-off Built-in, easily adjustable flow control and temperature limiter

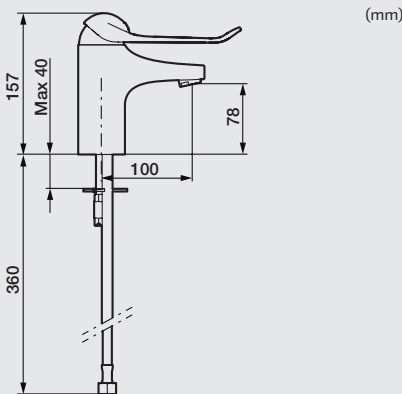


Art. no.	Designation
425-106.	Basin mixer Granberg 425-106 - 150 mm lever with self-closing hand shower

Functions and advantages

- Easily accessible lever, length 150 mm
- Self-closing hand shower

Specifications

Lever	150 mm
Spout projection	100 mm
Length of hose, hand shower	1500 mm
Connection pipe	Soft PEX pipe, length 350 mm
Hole size	Ø 33.5–37 mm
Other	Cold start feature Soft action ceramic shut-off Built-in, easily adjustable flow control and temperature limiter

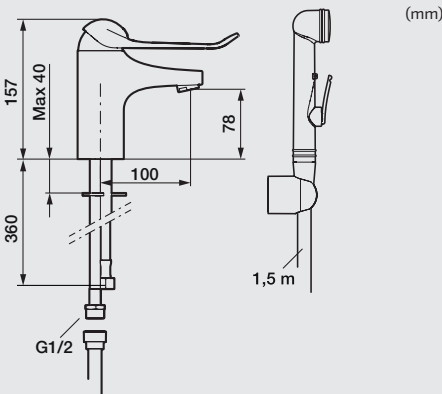




Functions and advantages

- Touch-free, easy to use

Specifications

Lever	150 mm
Spout projection	108 mm
Connection pipe	Soft PEX pipe, length 350 mm
Hole size	Ø 33.5–37 mm
Other	The temperature is set at the side of the mixer Low power consumption – long life Battery included

Art. no.	Designation
425-110.	Basin mixer Granberg 425-110 - Touch free

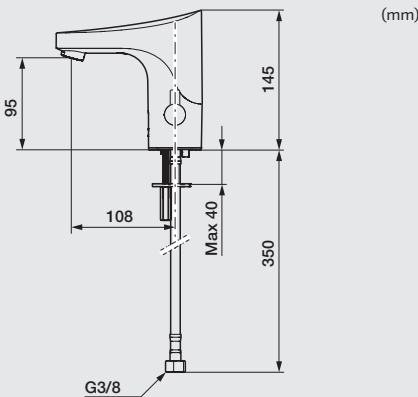




Functions and advantages

- Easily accessible lever, length 150 mm
- Swivel spout 110 degrees

Specifications

Lever	150 mm
Spout projection	115 mm
Swivel spout	110°
Connection pipe	Soft PEX pipe, length 350 mm
Hole size	Ø 28-37 mm
Other	Soft-close action with ceramic seal Adjustable flow and temperature limiters

Art. no.	Designation
425-107.	Basin mixer Granberg 425-107 - 150 mm lever

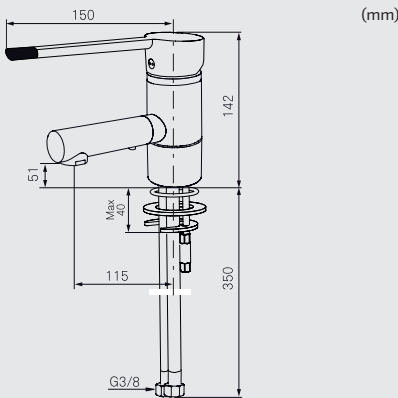



Specifications

Length	500 mm
Connection	R10 3/8"

Art. no.	Designation
425-311.	Water hoses, 2 pack



Specifications

Length	315 to 815 mm (spring-loaded)
Connection	Collar 40 mm. Rubber nipple 50-40 mm included

Art. no.	Designation
425-331.	Flexible drain hose with drainage trap

Safety system





Art. no.	Designation
425-401.	Safety switch to Designline 417 and Basicline 433, bolt attachment centre-to-centre 280 mm
425-403	Safety switch for Basicline 415 washbasin, bolt attachment, centre-to-centre 280 mm

Specifications

Function	Thanks to the safety switch, the basin will stop lowering if it comes into contact with any obstacle or the user's legs. Suitable for washbasins with 280 mm centre-to-centre bolt installation.
Installation	Installed between the back panel and wash basin

(mm)



Control buttons



Cable Hand Control

Dimensions: 170 x 63 x 27 mm

425-410



Radio Control - Hand Control


Dimensions: 110 x 38 x 10 mm

61385


Installations

Fittings and plumbing connections for electric height-adjustable models

Model:
Basicline 433
Designline 417

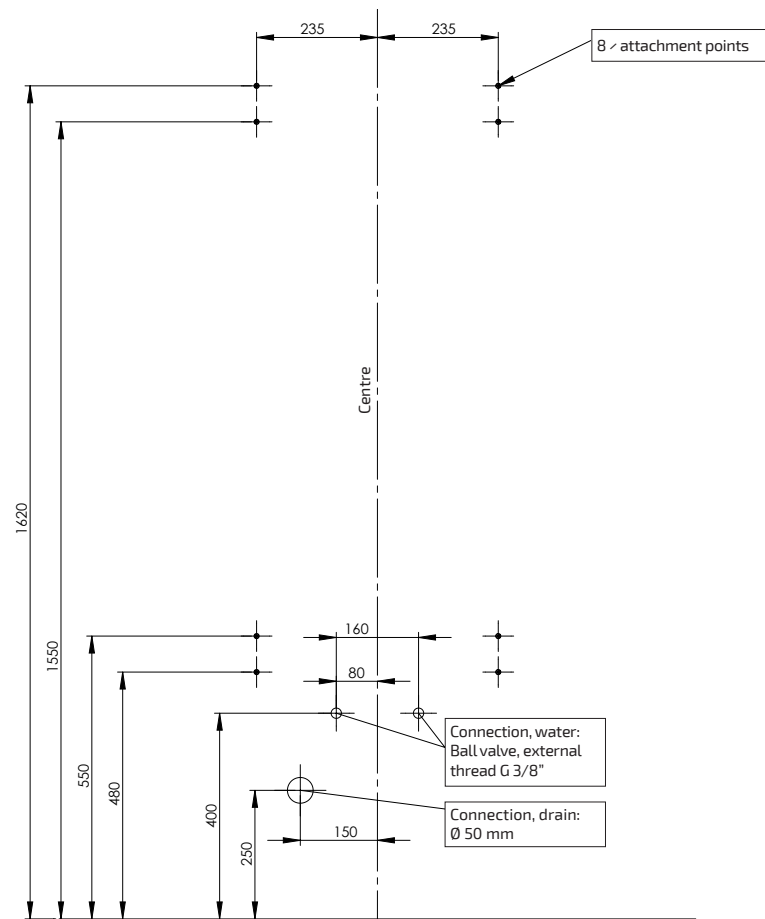


Model:
Basicline 415

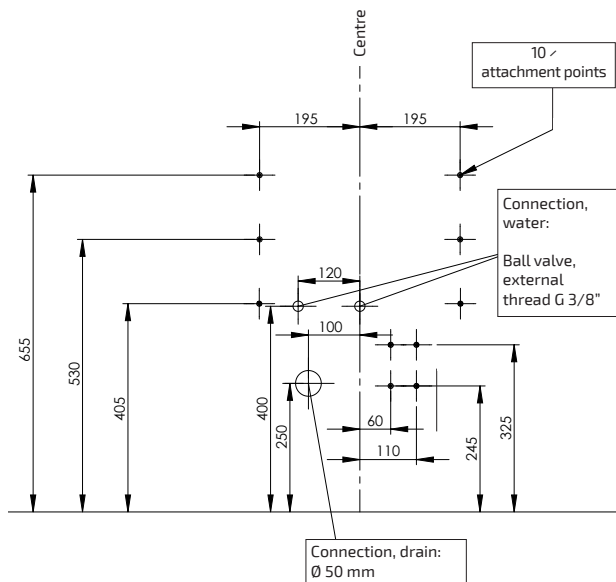


Installations

Fittings and plumbing connections for manual height-adjustable models


Model:
Basicline 401

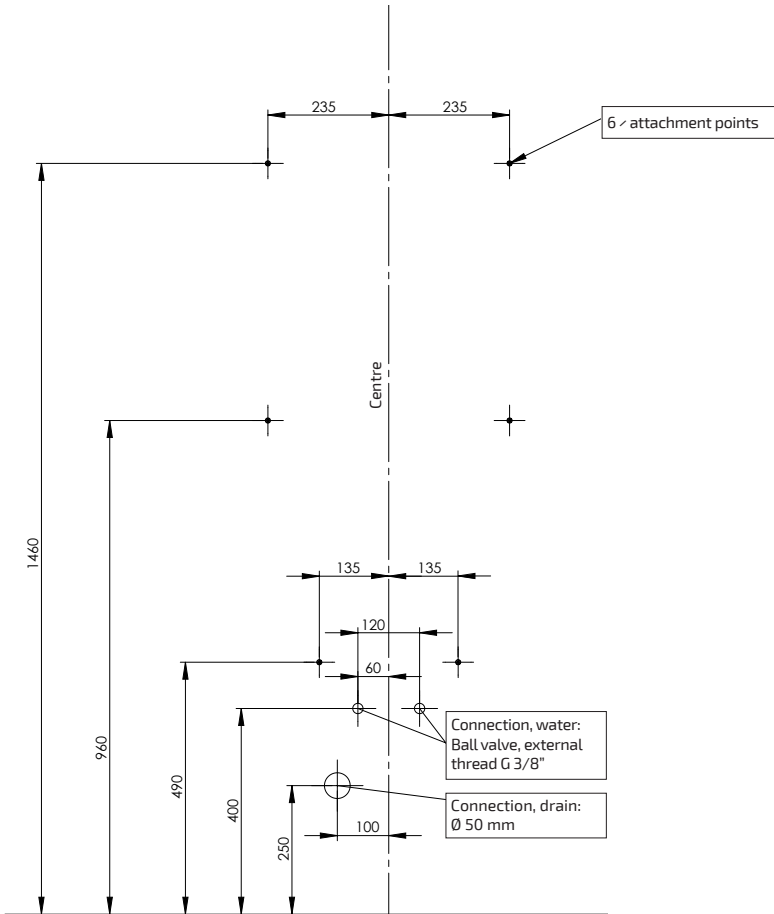

Model:
Basicline 403

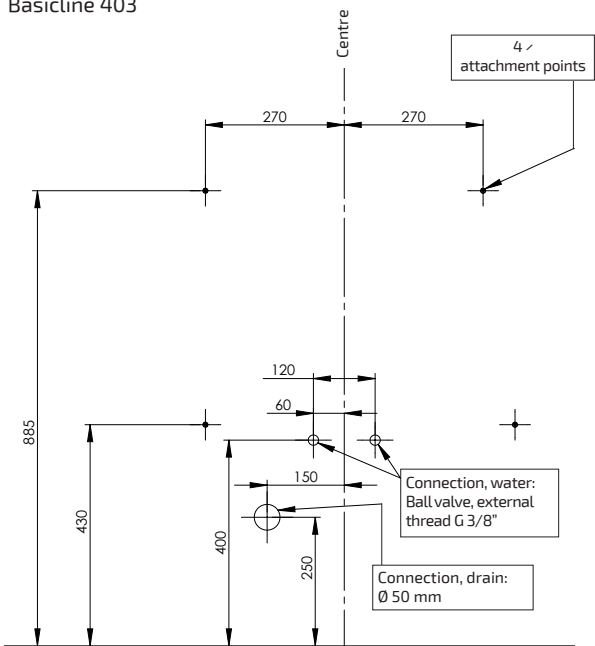


Model:
Basicline 406

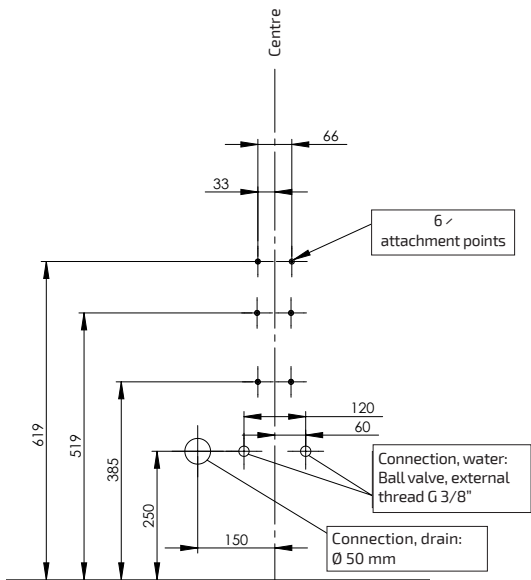


Installations

Electrical installation

Model:
Basicline 433
Designline 417

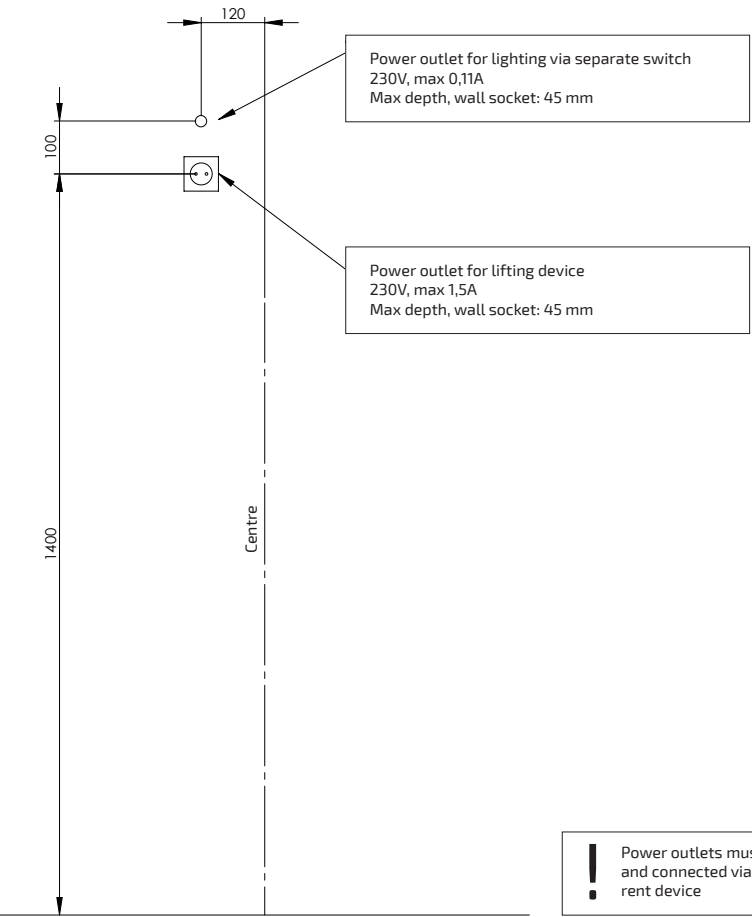

Model:
Basicline 415

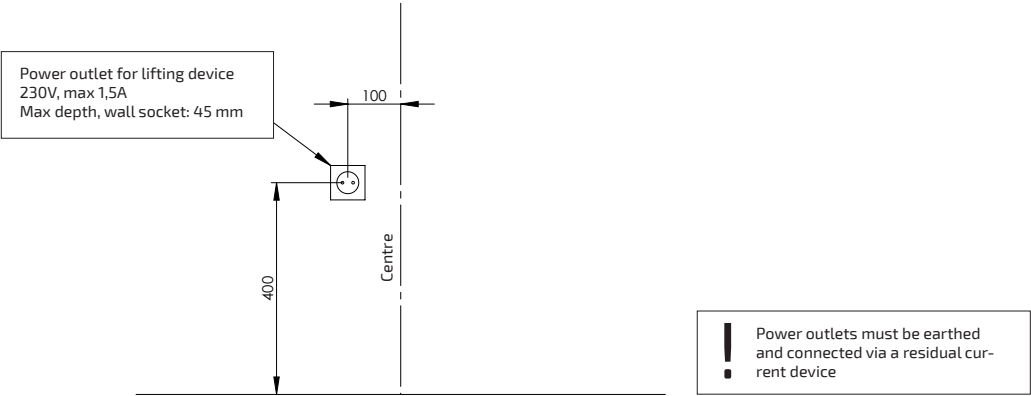

Installations

Electrical installation

Model:
Basicline 401

